

RX130 Group

Renesas Starter Kit Tutorial Manual For e² studio

RENESAS 32-Bit MCU RX Family / RX100 Series

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corporation without notice. Please review the latest information published by Renesas Electronics Corporation through various means, including the Renesas Electronics Corporation website (http://www.renesas.com).

Notice

- Descriptions of circuits, software and other related information in this document are provided only to illustrate the
 operation of semiconductor products and application examples. You are fully responsible for the incorporation of
 these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no
 responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or
 information.
- 2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- 4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
- Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anticrime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.

- 6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
- 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
- 11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics

Disclaimer

By using this Renesas Starter Kit (RSK), the user accepts the following terms:

The RSK is not guaranteed to be error free, and the entire risk as to the results and performance of the RSK is assumed by the User. The RSK is provided by Renesas on an "as is" basis without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, title and non-infringement of intellectual property rights with regard to the RSK. Renesas expressly disclaims all such warranties. Renesas or its affiliates shall in no event be liable for any loss of profit, loss of data, loss of contract, loss of business, damage to reputation or goodwill, any economic loss, any reprogramming or recall costs (whether the foregoing losses are direct or indirect) nor shall Renesas or its affiliates be liable for any other direct or indirect special, incidental or consequential damages arising out of or in relation to the use of this RSK, even if Renesas or its affiliates have been advised of the possibility of such damages.

Precautions

The following precautions should be observed when operating any RSK product:

This Renesas Starter Kit is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and any sensitive equipment. Its use outside the laboratory, classroom, study area or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures;

- ensure attached cables do not lie across the equipment
- · reorient the receiving antenna
- increase the distance between the equipment and the receiver
- · connect the equipment into an outlet on a circuit different from that which the receiver is connected
- power down the equipment when not in use
- consult the dealer or an experienced radio/TV technician for help NOTE: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken;

- The user is advised that mobile phones should not be used within 10m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

The Renesas Starter Kit does not represent an ideal reference design for an end product and does not fulfil the regulatory standards for an end product.

How to Use This Manual

1. Purpose and Target Readers

This manual is designed to provide the user with an understanding of how to use the e² studio IDE to develop and debug software for the RSK platform. It is intended for users designing sample code on the RSK platform, using the many different incorporated peripheral devices.

The manual comprises of step-by-step instructions to load and debug a project in e² studio, but does not intend to be a complete guide to software development on the RSK platform. Further details regarding operating the RX130 microcontroller may be found in the RX130 Group Hardware Manual and within the provided sample code.

Particular attention should be paid to the precautionary notes when using the manual. These notes occur within the body of the text, at the end of each section, and in the Usage Notes section.

The revision history summarizes the locations of revisions and additions. It does not list all revisions. Refer to the text of the manual for details.

The following documents apply to the RX130 Group. Make sure to refer to the latest versions of these documents. The newest versions of the documents listed may be obtained from the Renesas Electronics Web site.

Document Type	Description	Document Title	Document No.
User's Manual	Describes the technical details of the RSK hardware.	RSKRX130 User's Manual	R20UT3444EG
Tutorial Manual	Provides a guide to setting up RSK environment, running sample code and debugging programs.	RSKRX130 Tutorial Manual	R20UT3448EG
Code Generator Tutorial	Provides a guide to code generation and importing into the e ² studio IDE.	RSKRX130 Code Generator Tutorial Manual	R20UT3450EG
Quick Start Guide	Provides simple instructions to setup the RSK and run the first sample, on a single A4 sheet.	RSKRX130 Quick Start Guide	R20UT3449EG
Schematics	Schematics Full detail circuit schematics of the RSK. RSKRX130 Schematics		R20UT3443EG
Hardware Manual	Provides technical details of the RX130 microcontroller.	RX130 Group Hardware Manual	R01UH0560EJ

2. List of Abbreviations and Acronyms

Abbreviation	Full Form		
ADC	Analog-to-Digital Converter		
API	Application Programming Interface		
bps	Bits per second		
CMT	Compare Match Timer		
СОМ	COMmunications port referring to PC serial port		
CPU	Central Processing Unit		
DVD	Digital Versatile Disc		
E1 / E2 Lite	Renesas On-chip Debugging Emulator		
GUI	Graphical User Interface		
IDE	Integrated Development Environment		
IRQ	Interrupt Request		
LCD	Liquid Crystal Display		
LED	Light Emitting Diode		
LSB	Least Significant Bit		
LVD	Low Voltage Detect		
MCU	Micro-controller Unit		
MSB	Most Significant Bit		
PC	Personal Computer		
Pmod™	This is a Digilent Pmod [™] Compatible connector. Pmod [™] is registered to <u>Digilent Inc.</u> Digilent-Pmod_Interface_Specification		
PLL	Phase-locked Loop		
RAM	Random Access Memory		
ROM	Read Only Memory		
RSK	Renesas Starter Kit		
RTC	Realtime Clock		
SAU	Serial Array Unit		
SCI	Serial Communications Interface		
SPI	Serial Peripheral Interface		
TAU	Timer Array Unit		
TFT	Thin Film Transistor		
TPU	Timer Pulse Unit		
UART	Universal Asynchronous Receiver/Transmitter		
USB	Universal Serial Bus		
WDT	Watchdog timer		
All trademonto and re-	nistared trademarks are the property of their respective owners		

All trademarks and registered trademarks are the property of their respective owners.

Table of Contents

1. Overview		
4.4 Dumas	-	
1.1 Purpose1.2 Features	7 7	
2. Introduction	8	
2.1 Code Generator Plug in		
2.2 Note Regarding Source Code	8	
3. Tutorial Project Workspace	9	
3.1 Introduction		
3.2 Connecting the Debugger	9	
3.3 Starting e ² studio and Importing Sample Code		
3.4 Build Configurations and Debug Sessions		
3.4.1 Build Configuration		
3.4.2 Debug Configuration		
3.5 Running the Tutorial	13	
4. Reviewing the Tutorial Program	14	
4.1 Program Initialization		
4.2 Main Functions		
5. Additional Information	20	



RSKRX130

R20UT3448EG0100 Rev. 1.00 Nov 30, 2015

RENESAS STARTER KIT

1.Overview

1.1 **Purpose**

This RSK is an evaluation tool for Renesas microcontrollers. This manual describes how to get the RSK tutorial started, and basic debugging operations.

1.2 **Features**

This RSK provides an evaluation of the following features:

- Renesas microcontroller programming
- User code debugging
- User circuitry such as switches, LEDs and a potentiometer
- Sample application
- Sample peripheral device initialization code

The RSK board contains all the circuitry required for microcontroller operation.

RSKRX130 2. Introduction

2.Introduction

This manual is designed to answer, in tutorial form, the most common questions asked about using a Renesas Starter Kit (RSK). The tutorials help explain the following:

- How do I compile, link, download and run a simple program on the RSK?
- · How do I build an embedded application?
- How do I use Renesas' tools?

Files referred to in this manual are installed using the project generator as you work through the tutorials. The tutorial examples in this manual assume that installation procedures described in the RSK Quick Start Guide have been completed. Please refer to the Quick Start Guide for details of preparing the configuration.

Due to the project generator, it is possible that line numbers for source code illustrated in this document do not match exactly with that in the actual source files. It is also possible that the source address of instructions illustrated in this manual differ from those in user code compiled from the same source. These differences are minor, and do not affect the functionality of the sample code nor the validity of this manual.

These tutorials are designed to show you how to use the RSK and are not intended as a comprehensive introduction to e^2 studio, the compiler toolchains or the E2 Lite emulator. Please refer to the relevant user manuals for more in-depth information.

2.1 Code Generator Plug in

The Code Generator plug in for the RX130 has been used to generate the sample code discussed in this document. Code Generator for e² studio is a plug in tool for generating template 'C' source code and project settings for the RX130. When using Code Generator, the engineer is able to configure various MCU features and operating parameters using intuitive GUI controls, thereby bypassing the need in most cases to refer to sections of the Hardware Manual.

Once the engineer has configured the project, the 'Generate Code' function is used to generate three code modules for each specific MCU feature selected. These code modules are name 'r_cg_xxx.h', 'r_cg_xxx.c', and 'r_cg_xxx_user.c', where 'xxx' is a three letter acronym for the relevant MCU feature, for example 'adc'. Within these code modules, the engineer is then free to add custom code to meet their specific requirement. Custom code should be added, whenever possible, in between the following comment delimiters:

```
/* Start user code for adding. Do not edit comment generated here */
/* End user code. Do not edit comment generated here */
```

Code Generator will locate these comment delimiters, and preserve any custom code inside the delimiters on subsequent code generation operations. This is useful if, after adding custom code, the engineer needs to revisit Code Generator to change any MCU operating parameters.

2.2 Note Regarding Source Code

Due to the project generator, it is possible that line numbers for source code illustrated in this document do not match exactly with that in the actual source files. It is also possible that the source address of instructions illustrated in this manual differ from those in user code compiled from the same source. These differences are minor, and do not affect the functionality of the sample code nor the validity of this manual.

3. Tutorial Project Workspace

3.1 Introduction

e² studio is an open source integrated development tool that allows the user to write, compile, program and debug a software product on many of the Renesas microcontrollers.

3.2 Connecting the Debugger


For this tutorial the E2 Lite debugger will provide power to the RSK, no external power supply is required.

The Quick Start Guide provided with the Renesas Starter Kit board gives detailed instructions on how to connect the E2 Lite to the host computer. The following assumes that the steps in the Quick Start Guide have been followed and the E2 Lite drivers have been installed.

- Fit the PMOD LCD display to the board. Ensure all the pins of the connector are correctly inserted in the socket.
- Connect the E2 Lite Debugger to a free USB port on your computer.
- Connect the E2 Lite Debugger to the target hardware ensuring that it is plugged into the connector marked 'E1'.

Starting e² studio and Importing Sample Code 3.3


- Start e² studio by selecting it from the Windows™ Start Menu. The first dialog box to appear will be the Workspace Launcher.
- Click 'Browse' and select a suitable location to store your workspace, using the 'Create New Folder' option as necessary. Click 'OK'.

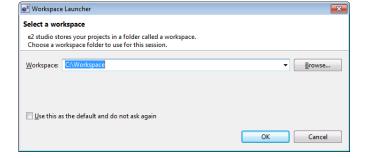


The e² studio welcome splash screen will appear. Click the 'Go to the e2 studio workbench' arrow button on the far right (circled in the screenshot opposite).



 Once the environment has initialized, right click in the 'Project Explorer' window and select 'Import...'

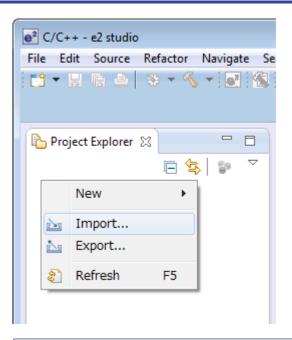


 The Import dialog box will now show. Expand the 'General' folder icon, and select 'Existing Projects into Workspace', then click 'Next'.

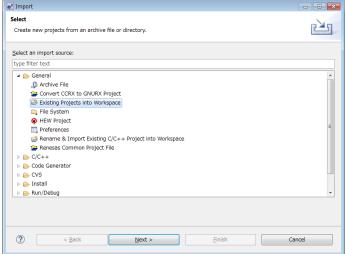


 The Import dialog box will allow you to specify a project to import. Click the 'Browse' button and locate the following directory:

C:\Renesas\Workspace\RSK\RSKRX130

 Ensure that the 'Copy projects into workspace' option is ticked, and then click 'Finish'

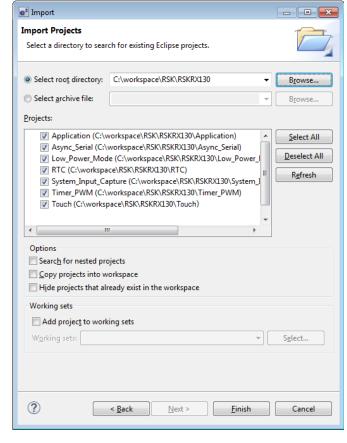

• Click on Tutorial from the list of projects in the 'Project Explorer' on the left-hand side.



3.4 Build Configurations and Debug Sessions

3.4.1 Build Configuration

The e² studio workspace will be created with two build configurations: 'HardwareDebug' and 'Release'.


Release

This build mode has optimisation turned on, and provides little debug information. The C code execution may appear to be out of order, due to the way compiler optimises the code. This build configuration is intended for final ROM-programmable code.

HardwareDebug

This build mode has all optimisation turned off, and provides full debug information. This is the best configuration to use whilst developing code as C code execution will be linear.


 Click the top level 'Tutorial' folder again, and then the arrow next to the build button (hammer icon), and select the 'HardwareDebug' option.




e² studio will now build the code.

3.4.2 Debug Configuration

 Click the arrow next to the debug button (bug icon). Select 'Debug Configurations'.

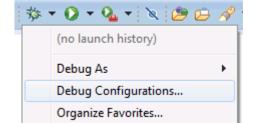


- The 'Debug Configurations' dialog box will appear. Click the small arrow next to the 'Renesas GDB Hardware Debugging' option.
- The debug configurations for each project will appear. Select the entry for the 'Tutorial Hardware Debug'.

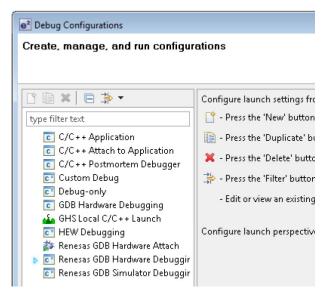


- The debug configurations control page will then show for the Tutorial project. Change the main tab to 'Debugger' and then select 'Connection Settings' on the secondary tab bar that appears.
- There is no need to change the debugger settings as they are preconfigured with the Tutorial project.
- Refer to the RSKRX130 User's Manual for details of power supply configuration.


Note: e² studio will display a warning if you attempt to connect with an incorrect power supply setting.


 Click the 'Debug' button to continue. e² studio will now connect to the debugger and download the code to the target.

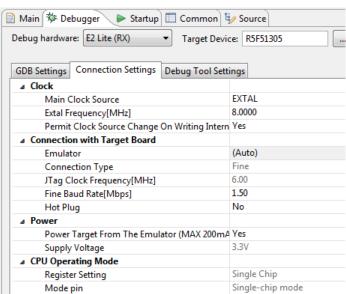


- A firewall warning may be displayed for 'e2-server-gdb.exe'. Check the 'Private networks, such as my home or work network' box and click 'Allow access'.
- A user account control dialog may be displayed. Enter the administrator password and click 'Yes'.
- After downloading the code a dialog box will appear asking if you would like to switch to the 'Debug perspective'. Click 'Remember my decision' to prevent this dialog box from appearing in future, then click 'Yes'
- e² studio will load the new perspective, which is optimised for debugging.
- To change back to the default 'C/C++' perspective, from the menu bar select Window > Open Perspective > Other.
- The 'Open Perspective' dialog box will appear. Click on the desired perspective to select it then 'OK'.



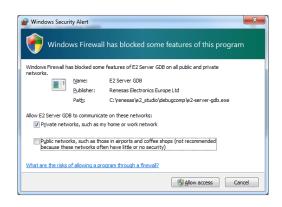

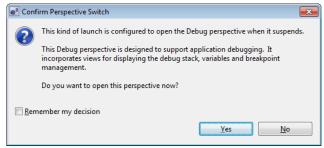

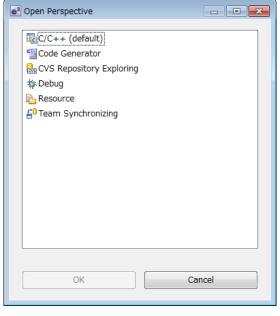



3.5 Running the Tutorial

- Refer to the description.txt file for instructions on how to configure the RSK and run the sample code.
- Once the code has been downloaded, click 'Resume' to run the code to the main function. The main function is set as the program entry point by default. The program counter will stop on the first instruction in the main function.
- Click the 'Resume' button in the 'Debug' perspective to run the rest of the code
- It is recommended that you run the entire tutorial demo first, before continuing to debug it.




4. Reviewing the Tutorial Program


This section will look at each section of the tutorial code and basic debugging functionality in e² studio.

4.1 Program Initialization

Before the main program can run, the microcontroller must be configured. The following parts of the tutorial program are used exclusively for initializing the RSK device so that the main function can execute correctly. The initialization code is run every time the device is reset via the reset switch or from a power cycle.

- Build and download the code as shown in Section 3.3.
- On the Project Explorer tab expand the 'Tutorial' folder by clicking on the arrow next to the folder icon, as highlighted by the red circle.
- Click the arrow next to the 'src' folder to show the source files.
- Expand the 'cg_src' folder in the same way and double click on 'r_cg_hardware_setup.c' to open the file.



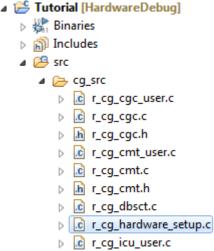

 Breakpoints can be set by double clicking at the left-hand edge of the source window. On the line with instruction R_Systeminit(), double click next to the vertical line to set a breakpoint.

```
Note: As an alternative breakpoints may be set in the C/C++ perspective by selecting a line and using Run > Toggle Breakpoint.
```

Click the 'Resume' button in the Debug perspective (or press [F8]) to run the code up to this breakpoint.



108

Note: The program counter is indicated by the blue arrow next to the breakpoint.

- Click the 'Step Into' button (or press [F5]), to step into the 'R Systeminit' function.
- The 'R_Systeminit' function calls several initialization functions which configure the MCU for normal operation. This includes input/output ports, and system clocks.
- The user can step through all the initialization code by clicking the 'Step Into' icon and reading the code however for the purpose of this manual, it will be skipped.
- Click the 'Resume' button, to run the code up to the main function.



```
57
                 * Function Name: R_Systeminit
                * Description : This function initializes every macro.
58
59
                  Arguments
                                : None
60
                * Return Value : None
61
62 fffe0f9d ⊖ void R_Systeminit(void)
63
64
                     /* Enable writing to registers related to operating modes.
65 fffe0fa2
                    SYSTEM.PRCR.WORD = 0xA50FU;
66
                    /* Enable writing to MPC pin function control registers */
MPC.PWPR.BIT.BOWI = OU;
67
68 fffe0fab
69 fffe0fb2
                    MPC.PWPR.BIT.PFSWE = 1U;
70
71
                     /* Initialize non-existent pins */
72 fffe0fb9
                    PORTO.PDR.BYTE = 0x07U;
PORT1.PDR.BYTE = 0x03U;
73 fffe0fc1
74 fffe0fc9
                     PORT2.PDR.BYTE = 0x3CU;
75 fffe0fd1
                     PORT3.PDR.BYTE = 0x08U;
76 fffe0fd9
                     PORT5.PDR.BYTE = 0xCFU;
                    PORTA.PDR.BYTE = 0x80U:
77 fffe0fe1
                    PORTC.PDR.BYTE = 0x03U;
78 fffe0fe9
                     PORTD.PDR.BYTE = 0xF8U;
79 fffe0ff1
80 fffe0ff9
                     PORTE.PDR.BYTE = 0xC0U;
81 fffe1001
                     PORTH.PDR.BYTE = 0xF0U;
82 fffe1009
                    PORTJ.PDR.BYTE = 0x3DU;
83
                     /* Set peripheral settings */
85 fffe100c
                     R_CGC_Create();
86 fffe1010
                     R_ICU_Create();
                    R_PORT_Create();
R_TMR_Create();
87 fffe1014
88 fffe1018
```

For further details regarding hardware configuration, please refer to the RSKRX130 User's Manual and the RX130 Group Hardware Manual.

4.2 Main Functions

This section will look at the program code called from with the main() function, and how it works. It is necessary to connect the RSK G1CUSB0 to a PC USB port and open a terminal emulation program, such as HyperTerminal, with the settings 19200, 8, N, 1. For information on installation of the RSK virtual COM port driver, refer to the file 'description.txt' in the e² studio Tutorial project.

 Right click the 'R_SCI1_Serial_Receive()' function call and select 'Run to Line' to execute the program up to this line. The 'R_LCD_Init()' function call enables and configures the LCD panel, and 'R_LCD_Display()' will write "RSKRX130 Tutorial Press Any Switch" onto the LCD.

```
void R MAIN UserInit(void);
   92 fffe1143 ⊖ void main(void)
                          R_MAIN_UserInit();
   94 fffe1145
    95
                             Start user code. Do not edit comment generated here */
   96
                             Initialize the switch module */
    97
    98 fffe1148
                          R SWITCH Init();
   99
                           ^{\prime *} Set the call back function when SW1 or SW2 is pressed ^{*}/
  101 fffe114c
                          R\_SWITCH\_SetPressCallback(cb\_switch\_press);
  102
  103
                             Initialize the debug LCD */
  104 fffe1156
                          R_LCD_Init();
                          /* Displays the application name on the debug LCD */
R_LCD_Display(0, (uint8_t *)" RSKRX130 ");
R_LCD_Display(1, (uint8_t *)" Tutorial ");
R_LCD_Display(2, (uint8_t *)" Press Any Switch ");
  106
  107 fffe115a
  108 fffe1166
  109 fffe1172
                             Start the A/D converter */
  111
  112 fffe117e
                          R S12AD Start();
  113
                            * Set up SCI1 receive buffer and callback function */
  115 fffe1184
                          R_SCI1_Serial_Receive((uint8_t *)&g_rx_char, 1);
                            * Enable SCI1 operations */
  118 fffe118e
                          R_SCI1_Start();
                            /* Set up SCI1 receive buffer and callback function */

⇒ 115 fffe1184

                           R_SCI1_Serial_Receive((uint8_t *)&g_rx_char, 1);
                           /* Enable SCI1 operations */
  118 fffe118e
                           R_SCI1_Start();
```

- Set a breakpoint on the 'R_SCI1_Start()' function call by double-clicking in the breakpoint column.
- Click the 'Step Into' button to step into the 'R_SCI1_Serial_Receive ()' function.
- The program counter should now move into the R_SCI1_Serial _Receive function definition. This function is an API function provided by the Code Generator. It sets up the UART interrupt handler code to receive a specified number of bytes into a receive buffer. Once the specified number of bytes has been received, the interrupt handler code calls a callback function as shown later on in this section.
- For full details on how to configure a project using Code Generator refer to the Code Generator Tutorial Manual.
- Click the 'Resume' button to resume program execution.

```
153 fffe1885 ⊖MD_STATUS R_SCI1_Serial_Receive(uint8_t * const rx_buf, uint16_t rx_num)
                   MD_STATUS status = MD_OK;
    fffe188b
157 fffe188e
                       if (1U > rx_num)
                       {
159 fffe1893
                            status = MD_ARGERROR;
                        else
161
162
163 fffe1898
                            g_sci1_rx_count = 0U;
g_sci1_rx_length = rx_num;
    fffe18a1
                           gp_sci1_rx_address = rx_buf;
SCI1.SCR.BIT.RIE = 1U;
SCI1.SCR.BIT.RE = 1U;
165 fffe18aa
    fffe18b8
167 fffe18bf
169
170 fffe18c1
                       return (status);
171 fffe18c7 }
```

- The program counter should come to a halt at the R_SCI1_Start function.
- Step over the function by clicking the 'Step Over' button. Alternatively, press [F6].




The R_SCI1_Start() function enables the UART interrupts. The program then proceeds to the main while() loop. The code inside the loop waits for user input from either the UART or RSK switches, and then performs an A/D conversion.

- Locate the function call to 'lcd_display_adc()' inside the while loop.
- Set a breakpoint on the 'lcd_display_adc()' function call by double-clicking in the breakpoint column.

```
120
                        while (1U)
  121
  122
                             uint16_t adc_result;
  123
                             /* Wait for user requested A/D conversion f
if (TRUE == g_adc_trigger)
  124
 125 fffe1233
  126
                             {
  127
                                  /* Call the function to perform an A/D
  128 fffe1195
                                 adc_result = get_adc();
 129
  130
                                  /* Display the result on the LCD */
🚜 131 fffe119a
                                 lcd_display_adc(adc_result);
```

 In the Project Explorer pane, locate the file 'r_cg_sci_user.c' and double-click to open the source file. Scroll down to the function r_sci1_callback_receiveend().

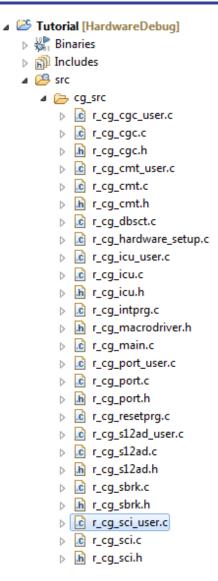

- Set a breakpoint on the line of code inside the r_sci1_callback_receiveend function as shown opposite.
- Continue to execute the program by clicking the 'Resume' button.

- In the terminal emulation window, press the 'c' button on the keyboard.
- The program will halt at the breakpoint in the r_sci1_callback_receiveend function as shown opposite. Remove the breakpoint by double-clicking on the breakpoint column.
- Continue to execute the program by clicking the 'Resume' button.
- The program will halt at the breakpoint in the main while loop.
- Remove the breakpoint by doubleclicking on the breakpoint column.
 Continue to execute the program by clicking the 'Resume' button.

```
/* Check the contents of g_rx_char */
 188 fffe1b20
                      if (('c' == g_rx_char) || ('C' == g_rx_char))
 189
190
                          g_adc_trigger = TRUE;
191
 130
                               /* Display the result on the LCD */
% 131 fffe119a
                               lcd_display_adc(adc_result);
  132
  133
                               /* Increment the adc_count and display
  134 fffe119f
                               if (16 == (++adc_count))
  135
  136 fffe11b1
                                   adc count = 0;
  137
  138 fffe11ba
                               led_display_count(adc_count);
```

The program proceeds to display the result of the A/D conversion on the LCD and in the terminal window. In addition, the running count of A/D conversions performed is displayed in binary form using LEDs 0-3 on the RSK. Adjust the potentiometer and press SW1, SW2 or SW3 on the RSK and an additional A/D conversion will be performed.

- Press the 'Suspend' button to halt program execution.
- To change back to the default 'C/C++' perspective, from the menu bar select Window > Open Perspective > 'C/C++'
- Alternatively, click on the 'C/C++' button in the top right corner of the screen, as shown opposite.
- This is the extent of the tutorial code.





For further details regarding hardware configuration, please refer to the RX Series Software Manual and the RX130 Group Hardware Manual.

The E2 Lite emulator features advanced logic-based event point trigger system, and full instruction on its use is outside the scope of this tutorial. For further details, please refer to the E2 Emulator Lite User's Manual.

RSKRX130 5. Additional Information

5. Additional Information

Technical Support

For details on how to use e^2 studio, refer to the help file by opening e^2 studio, then selecting Help > Help Contents from the menu bar.



Parts of the sample code provided with the RSKRX130 can be reproduced using the Code Generator tool. Code Generator is included as a plug in with e² studio.

Source files and functions generated by Code Generator are prefixed with 'r_' and 'R_', respectively.

For information about the RX130 Group microcontrollers refer to the RX130 Group Hardware Manual.

For information about the RX assembly language, refer to the RX Family Software Manual.

Technical Contact Details

Please refer to the contact details listed in section 9 of the "Quick Start Guide"

General information on Renesas Microcontrollers can be found on the Renesas website at: http://www.renesas.com/

Trademarks

All brand or product names used in this manual are trademarks or registered trademarks of their respective companies or organisations.

Copyright

This document may be, wholly or partially, subject to change without notice. All rights reserved. Duplication of this document, either in whole or part is prohibited without the written permission of Renesas Electronics Europe Limited.

- © 2015 Renesas Electronics Europe Limited. All rights reserved.
- © 2015 Renesas Electronics Corporation. All rights reserved.
- © 2015 Renesas System Design Co., Ltd. All rights reserved.

REVISION HISTORY	RSKRX130 Tutorial Manual
------------------	--------------------------

Rev.	Date	Description	
		Page	Summary
1.00	Nov 30, 2015	_	First Edition issued

Renesas Starter Kit Manual: Tutorial Manual

Publication Date: Rev. 1.00 Nov 30, 2015

Published by: Renesas Electronics Corporation



SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics America Inc. 2801 Scott Boulevard Santa Clara, CA 95050-2549, U.S.A. Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited 9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3 Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, German Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd. Room 1709, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100191, P.R.China Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333 Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd. 13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd. 80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949 Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HALII Stage, Indiranagar, Bangalore, India Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd. 12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea Tel: +82-2-558-3737, Fax: +82-2-558-5141

RX130 Group

